

SUPERVISION

www.super<mark>vision</mark>.fr

LM103


design trailer-mounted LED screen on rotating mast


■ PIXEL 10/20 mm virtual RGB • 4 Leds / pixel

| Image 16/9 | 13 440 L x 7 680 l (mm) |
|-------------------------------|-------------------------|
| Overall length on the road | 17 100 mm |
| Overall weight when installed | 28 T |
| Overall weight on the road | 35 T |
| Overall height on the road | 4 000 mm |

| SPECIFICATIONS (*) | | |
|-----------------------|--|--|
| VIEWING ANGLE | 140° | |
| RESOLUTION | 1 344 x 768 virtual pixels (video lines) | |
| VIEWING DISTANCE | min. 20 m / max. 220 - 310 m | |
| BRIGHTNESS | \geq 6 500 Cd / m^2 (NIT) | |
| DENSITY | 4 444 Pixels (v) / m² | |
| CEE FORM CONNECTION | 380 / 415 V 3P + N + G Electrical panel or 1 plug P17 - 125 A | |
| POWER SUPPLY | supply: 80 kVA max. / 40 kVA average power generator with automatic voltage regulator (AVR): 125 kVA | |
| VIDEO SIGNALS | SDI HD/SD | |
| TIME FOR INSTALLATION | 2 hours | |

The screen in mounted on a hydraulic and rotating mast (360°), positionning the bottom of the image between 1.2 and 4 m from ground.



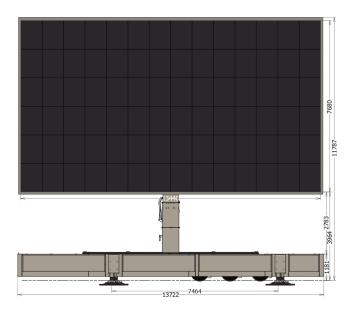

SUPERVISION

contact@supervision.fr | www.supervision.fr Bât. DC3 - ZAC de la Prairie - 2 rue Vitruve 91140 Villebon-sur-Yvette FR T + 33 (0) 1 69 79 91 20