



SUPERVISION

www.supervision.fr

LM15 design mobile LED screen

LM15

design mobile LED screen
on rotating mast

■ **PIXEL** 8.33 mm Full Black SMD Led

Image 16/9	5 200 L x 2 800 l (mm)
Overall length on the road	14 000 mm
Overall weight when installed	3,2 T
Overall weight on the road	5,2 T (without PG) / 7 T (with PG)
Overall height on the road	2 870 mm

SPECIFICATIONS (*)

VIEWING ANGLE	140°
RESOLUTION	624 x 336 pixels (video lines)
VIEWING DISTANCE	min. 8
BRIGHTNESS	4 500 - 5 000 Cd / m ² (NIT)
DENSITY	14 400 Pixels / m ²
CEE FORM CONNECTION	380 / 415 V 3P + N + G Electrical panel or 1 plug P17 - 32 A
POWER SUPPLY	supply : 15 kVA max. / 9 kVA average power generator with automatic voltage regulator (AVR) : 20 kVA
VIDEO SIGNALS	SDI HD / SD
TIME FOR INSTALLATION	30 min.


The screen is mounted on a hydraulic and rotating mast (360°), positioning the bottom of the image between 1 and 3 m from ground .

Power generator (optional)
Model EPS 243 TDE

Tank volume 73 l - Average fuel consumption 6 l/hour - Autonomy at full charge 12h - Noise level at 7m : 68 dBA - Reference conditions : altitude 1000m / temperature -18°C to +40°C



(*) Subject to validation by Supervision for each project

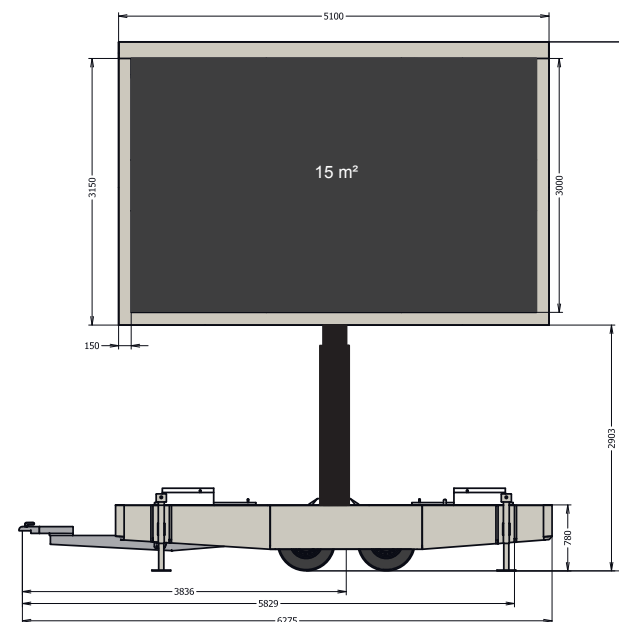

© 2018 SUPERVISION

SUPERVISION

contact@supervision.fr | www.supervision.fr
Bât. DC3 - ZAC de la Prairie - 2 rue Vitruve
91140 Villebon-sur-Yvette FR
T + 33 (0) 1 69 79 91 20