



SUPERVISION

www.supervision.fr

LM62a

design LED screen

LM62 (2 units)

design trailer-mounted LED screen
on rotating mast

■ **PIXEL** High Brightness 12 mm SMD LED

Image 16/9	10 752 L x 5 760 l (mm)
Overall length on the road	16 500 mm (with Power Generator) 14 500 mm (without Power Generator)
Overall weight when installed	23 T
Overall weight on the road	30 (with Power Generator) / 35 T (without Power Generator)
Overall height on the road	4 000 mm

SPECIFICATIONS (*)



VIEWING ANGLE	140°
RESOLUTION	896 x 480 pixels (video lines)
VIEWING DISTANCE	min. 15 m / max. 220 - 310 m
BRIGHTNESS	≥ 6 000 Cd / m ² (NIT)
DENSITY	6 940 Pixels / m ²
CEE FORM CONNECTION	380 / 415 V 3P + N + G Electrical panel or 1 plug P17 - 125 A
POWER SUPPLY	supply : 61 kVA max. / 30 kVA average power generator with automatic voltage regulator (AVR) : 80 kVA
VIDEO SIGNALS	SDI HD / SD
TIME FOR INSTALLATION	1,5 hours

The screen is mounted on a hydraulic and rotating mast (360°), positioning the bottom of the image between 1.5 and 4 m from ground.

Power generator (optional)
Model DE55 LS TWINPACK
Tank volume : 400 l (200 l / tank) - Average consumption : 7,5 l / hour - Autonomy at full charge : 53h - Noise level at 7m : 40 dBA - Reference conditions : altitude 1000m / temperature -18°C to +40°C



(*) Subject to validation by Supervision for each project

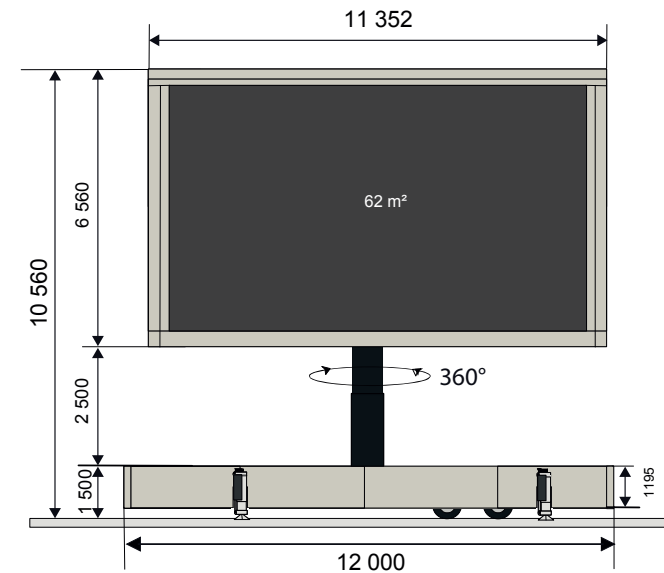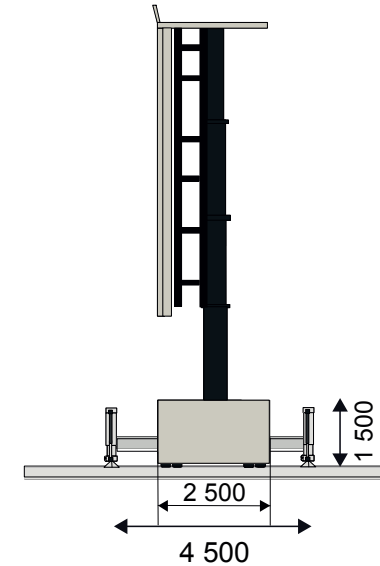

© 2018 SUPERVISION

SUPERVISION

contact@supervision.fr | www.supervision.fr
Bât. DC3 - ZAC de la Prairie - 2 rue Vitruve
91140 Villebon-sur-Yvette FR
T + 33 (0) 1 69 79 91 20