



SUPERVISION

www.supervision.fr

LMC40 truck-mounted screen

LMC40

truck-mounted screen
on rotating mast

■ **PIXEL** 11/22 mm virtual RGB • 4 Leds / pixel

Image 16/9	7 920 L x 4 920 I (mm)
Overall length on the road	16 500 mm
Overall weight when installed	33 T
Overall weight on the road	40 T
Overall height on the road	4 000 mm

SPECIFICATIONS (*)



VIEWING ANGLE	140°
RESOLUTION	720 x 447 pixels (v) (video lines)
VIEWING DISTANCE	min. 15 m / max. 200 m
BRIGHTNESS	≥ 6 000 Cd / m² (NIT)
DENSITY	3 673 Pixels (v) / m²
CEE FORM CONNECTION	380 / 415 V 3P + N + G Electrical panel or 1 plug P17 - 63 A
POWER SUPPLY	supply : 50 kVA max. / 35 kVA average power generator with automatic voltage regulator (AVR) : 60 kVA
VIDEO SIGNALS	SDI HD / SD
TIME FOR INSTALLATION	1 hour

The screen is mounted on a hydraulic and rotating mast (360°), positioning the bottom of the picture between 4,20 m and 6,50 m from ground.

Integrated power generator
Model ATLAS COPCO QAS 108
Tank volume : 300 l - Average fuel consumption : 8l / hour - Autonomy at full charge : 39h - Noise level at 7m : 68 dBA - Reference conditions :
altitude 1000m / temperature -18°C to +40°C



(*) Subject to validation by Supervision for each project

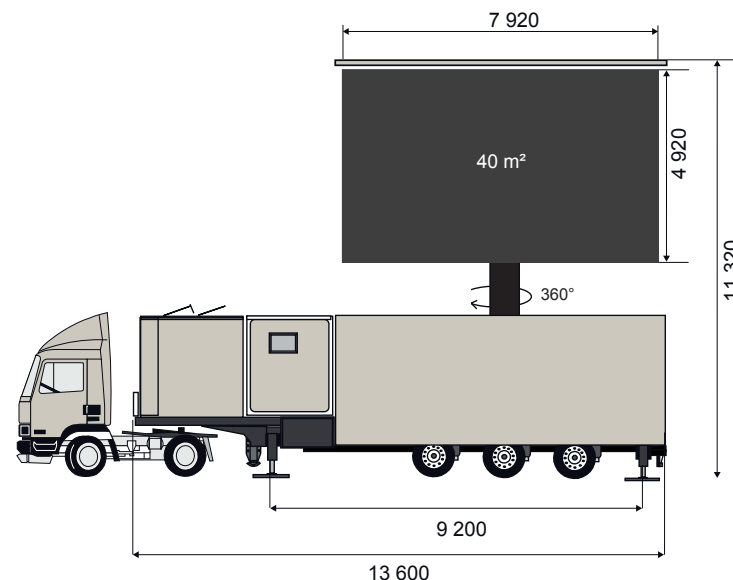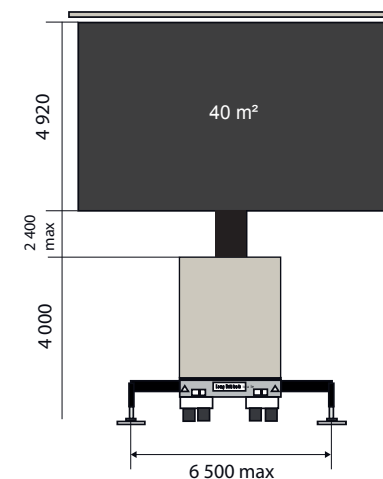

© 2018 SUPERVISION

SUPERVISION

contact@supervision.fr | www.supervision.fr
Bât. DC3 - ZAC de la Prairie - 2 rue Vitruve
91140 Villebon-sur-Yvette FR
T + 33 (0) 1 69 79 91 20