



SUPERVISION

www.supervision.fr

LMC50

truck-mounted screen

LMC50

truck-mounted screen
on rotating mast

■ **PIXEL** real 10 mm RGB • 3 Leds / pixel

| | |
|-------------------------------|------------------------|
| Image 16/9 | 9 600 L x 5 120 l (mm) |
| Overall length on the road | 16 500 mm |
| Overall weight when installed | 24 T |
| Overall weight on the road | 33 T |
| Overall height on the road | 4 000 mm |

SPECIFICATIONS (*)

| | |
|-----------------------|--|
| VIEWING ANGLE | > 140° |
| RESOLUTION | 960 x 512 pixels (video lines) |
| VIEWING DISTANCE | min. 10 m / max. 150 - 250 m |
| BRIGHTNESS | ≥ 7 000 Cd / m ² (NIT) |
| DENSITY | 10 000 Pixels / m ² |
| CEE FORM CONNECTION | 380 / 415 V 3P + N + G Electrical panel or 1 plug P17 - 63 A |
| POWER SUPPLY | supply : 32 kVA max. / 15 kVA average power generator with automatic voltage regulator (AVR) : 60 kVA |
| VIDEO SIGNALS | SDI HD / SD |
| TIME FOR INSTALLATION | 1 hour |



The screen is mounted on a hydraulic and rotating mast (360°), positioning the bottom of the image between 4,20 m and 5,50 m from ground.

Integrated power generator
Model SMDO 60 kVA

Tank volume : 390 l - Average fuel consumption : 11,3 l / hour - Autonomy at full charge : 40h - Noise level at 7m : < 70 dBA - Reference conditions : 1000m altitude / temperature -18°C to +40°C



(*) Subject to validation by Supervision for each project

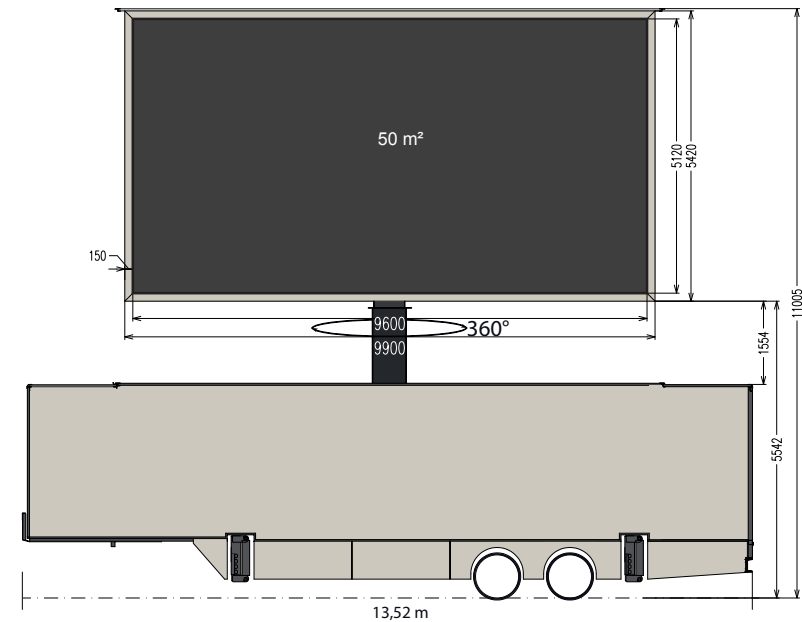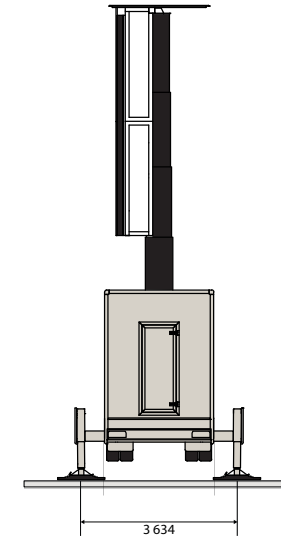

© 2018 SUPERVISION

SUPERVISION

contact@supervision.fr | www.supervision.fr
Bât. DC3 - ZAC de la Prairie - 2 rue Vitruve
91140 Villebon-sur-Yvette FR
T + 33 (0) 1 69 79 91 20