



SUPERVISION

www.supervision.fr

LMC30 vision 4.9

LMC30 vision 4.9 (2 units)

design container-mounted screen
on rotating mast

■ **PIXEL** 4,9 mm Full Black SMD Led

LMC30	
Image 16/9	6 996 L x 4 054 l (mm)
Overall length on the road	10 580 mm
Weight when installed (screen + container + PG)	11 T
Overall weight on the road	24,5 T
Overall height on the road	4 000 mm

SPECIFICATIONS (*)	
VIEWING ANGLE	> 160°
RESOLUTION	1 408 x 816 pixels (video lines)
VIEWING DISTANCE	min. 8 m / max. 125 - 240 m
BRIGHTNESS	≥ 5 000 Cd / m ² (NIT)
DENSITY	40 512 Pixels / m ²
CEE FORM CONNECTION	380 / 415 V 3P + N + G Electrical panel or 1 plug P17 - 63 A
POWER SUPPLY	supply : 28 kVA max. / 18 kVA average power generator with automatic voltage regulator (AVR) : 40 kVA
VIDEO SIGNALS	SDI HD / SD
TIME FOR INSTALLATION	1 hour



The screen is mounted on a hydraulic and rotating mast (360°), positioning the bottom of the image between 3.30 m and 4.85 m from ground.

Integrated power generator
Model SMDO 60 kVA

Tank volume : 390 l - Average fuel consumption : 11,3 l / hour - Autonomy at full charge : 40h - Noise level at 7m : 68 dBA - Reference conditions : altitude 1000m / temperature -18°C to +40°C



(*) Subject to validation by Supervision for each project

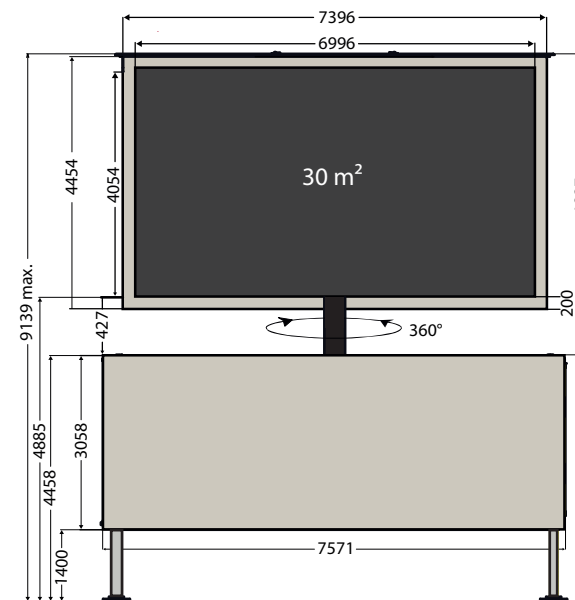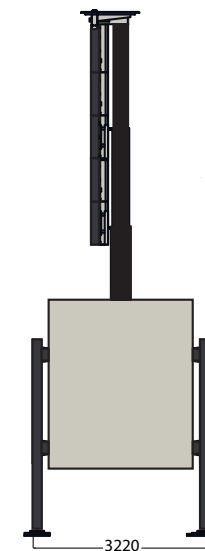

© 2018 SUPERVISION

SUPERVISION

contact@supervision.fr | www.supervision.fr
Bât. DC3 - ZAC de la Prairie - 2 rue Vitruve
91140 Villebon-sur-Yvette FR
T + 33 (0) 1 69 79 91 20