



SUPERVISION

www.supervision.fr

M5.8 modular

M5.8

outdoor modular screen

■ **PIXEL** 5.8 mm High Brightness Full Black CREE SMD Led


Image 16/9	480 W x 480 H x 92 D (mm)
Weight of a module	5 kg
Module size	0,2304 m ²

FORMATS					
FORMAT 16:9	5 x 3	7 x 4	9 x 5	11 x 6	16 x 9
RESOLUTION (pixel)	410 x 246	574 x 328	738 x 410	902 x 492	1 312 x 738
SIZE (m ²)	3,45	6,45	10,36	15,20	33,17
DIMENSIONS (m)	2,40 x 1,44	3,36 x 1,92	4,32 x 2,4	5,28 x 2,88	7,68 x 4,32
WEIGHT OF THE SCREEN (Kg) *	75	140	225	330	720
Other formats may be possible. * Weight of the screen before installation					


SPECIFICATIONS (*)	
VIEWING ANGLE	> 140° Horizontal - 100° Vertical
RESOLUTION	82 x 82 pixels (video lines) 6 724 pixels / module 29 184 pixels / m ²
BRIGHTNESS	≥ 4 000 - 5 000 Cd / m ² (NIT)
CEE FORM CONNECTION	Electrical panel or 1 plug P17 - 1 plug 32 A (1 plug 16 A / 15 modules) 380 / 415 v 3P + N + T
VIDEO SIGNALS	DVI, HDMI; S-Video; VGA; RGB; Composite Video; SDI etc.
POWER SUPPLY	supply : 870 W/m ² (max.) - 220 W/m ² (average) power generator with automatic voltage regulator : 1000 W / m ²

The modules are assembled together so as to form the final surface of the picture.
The screen may be hanged from overhead structures or stacked on scaffolding.

 (*) Subject to validation by Supervision for each project.

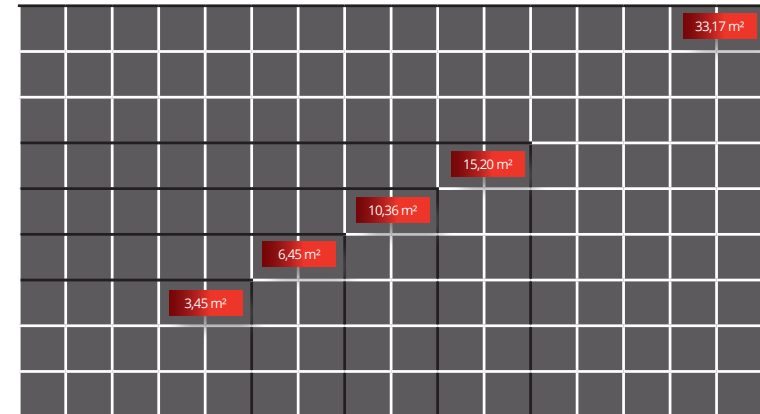

© 2018 SUPERVISION

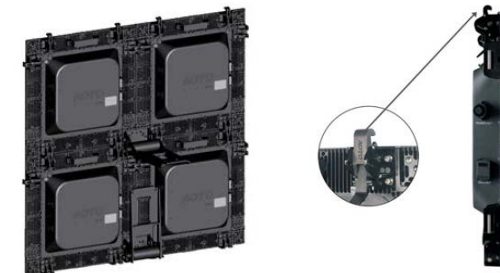

SUPERVISION

contact@supervision.fr | www.supervision.fr
Bât. DC3 - ZAC de la Prairie - 2 rue Vitruve
91140 Villebon-sur-Yvette FR
T + 33 (0) 1 69 79 91 20